

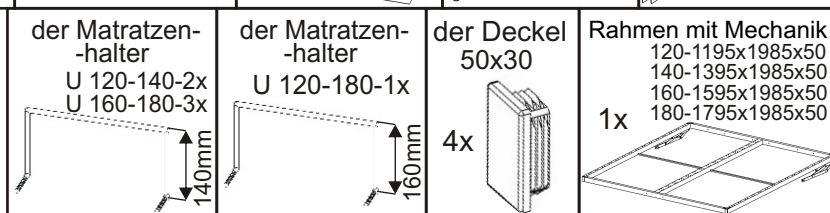
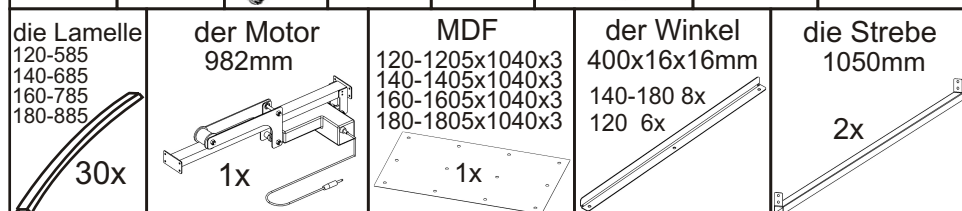
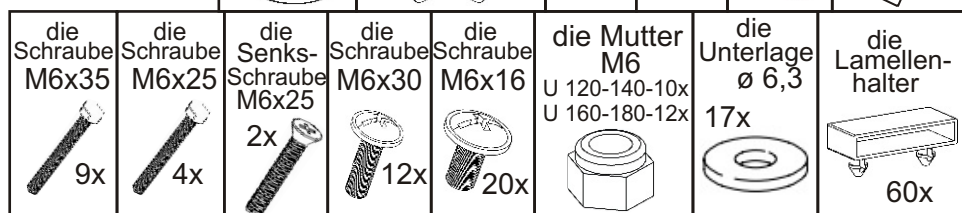
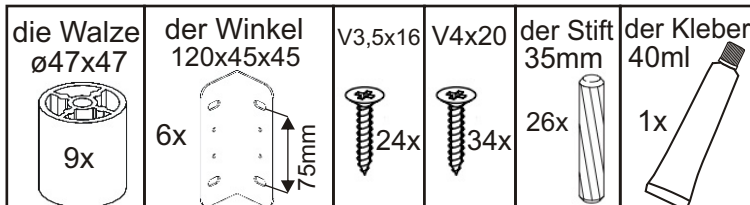











MEADOW NEW MOT 120,140,160,180

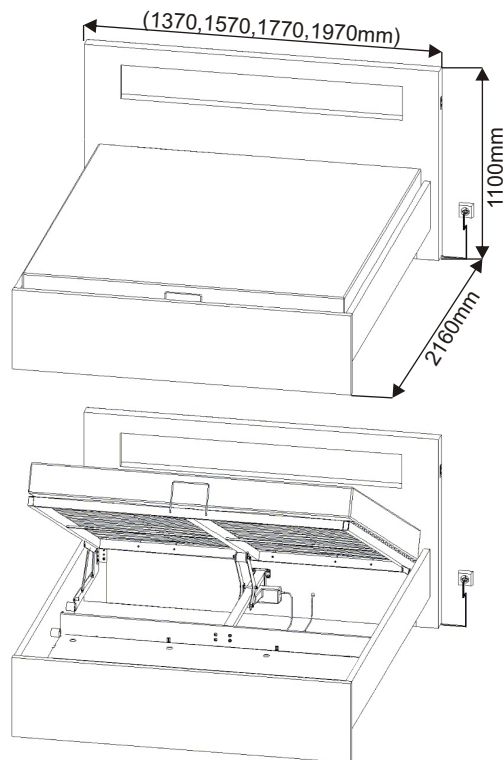


1.

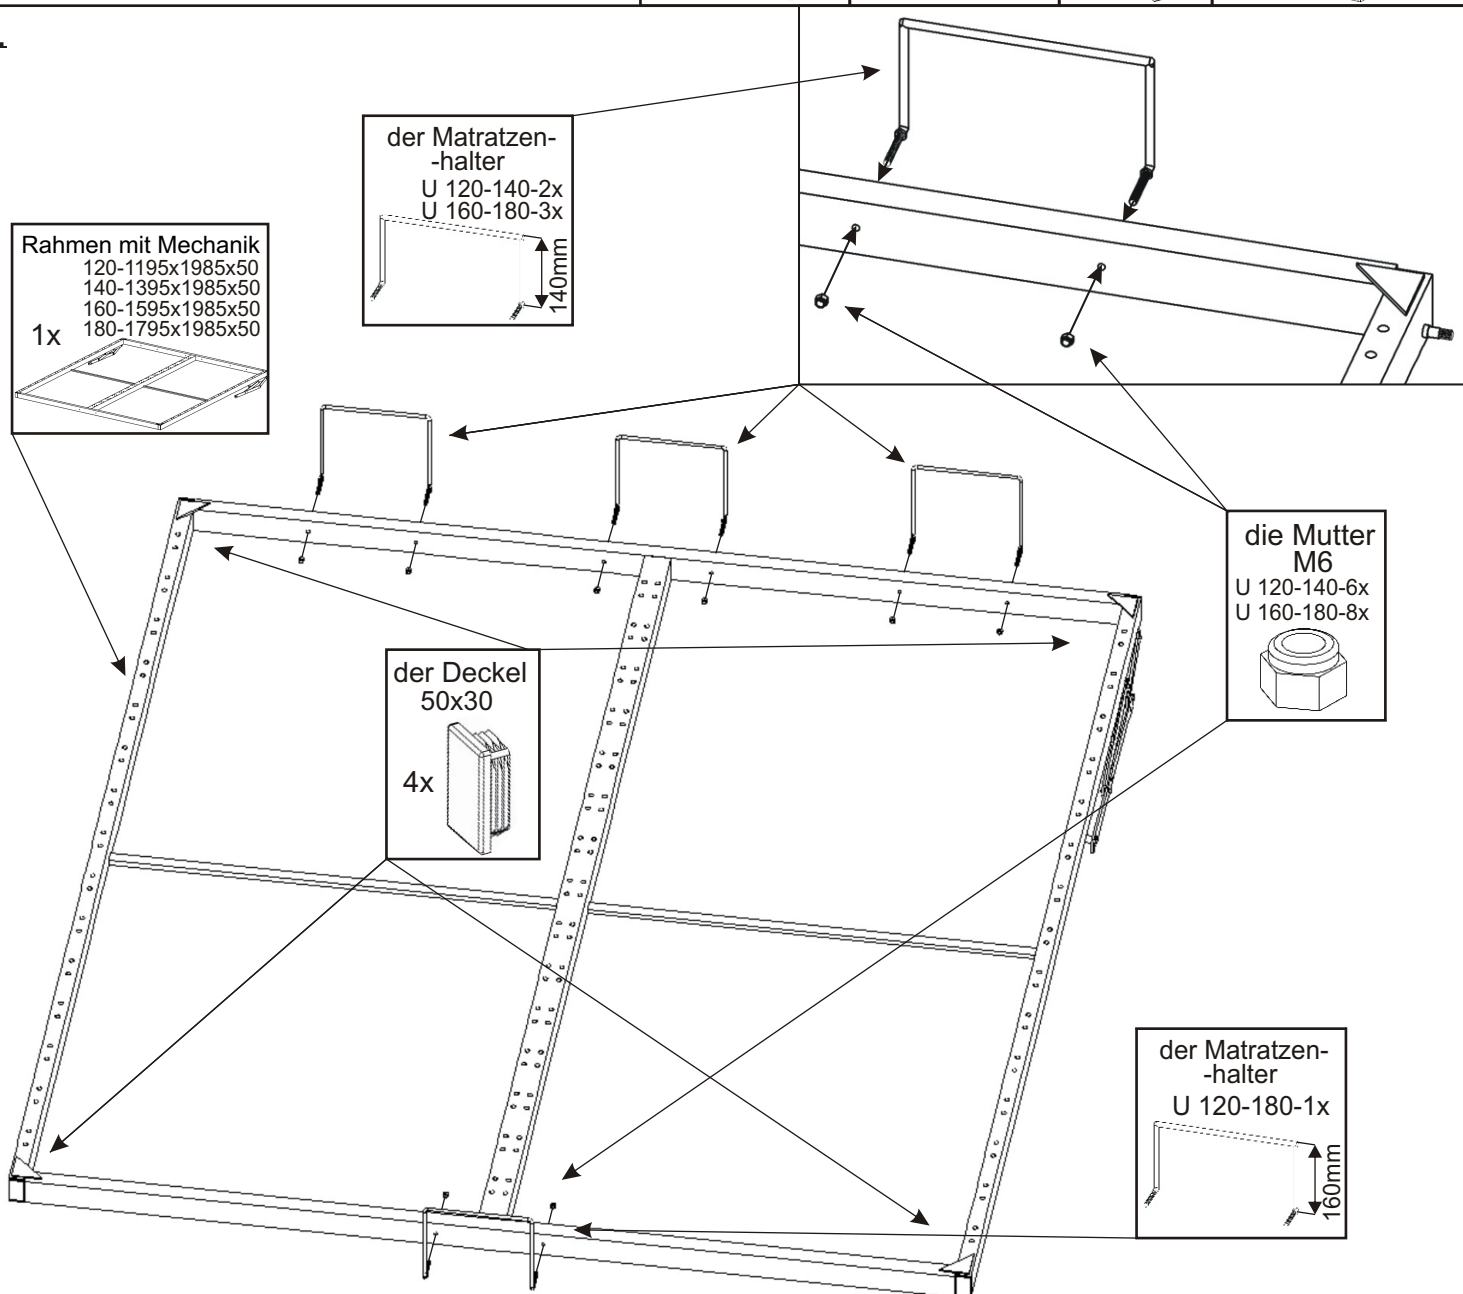


2.

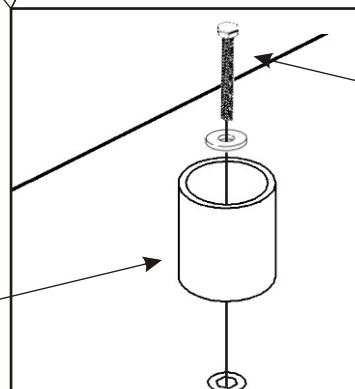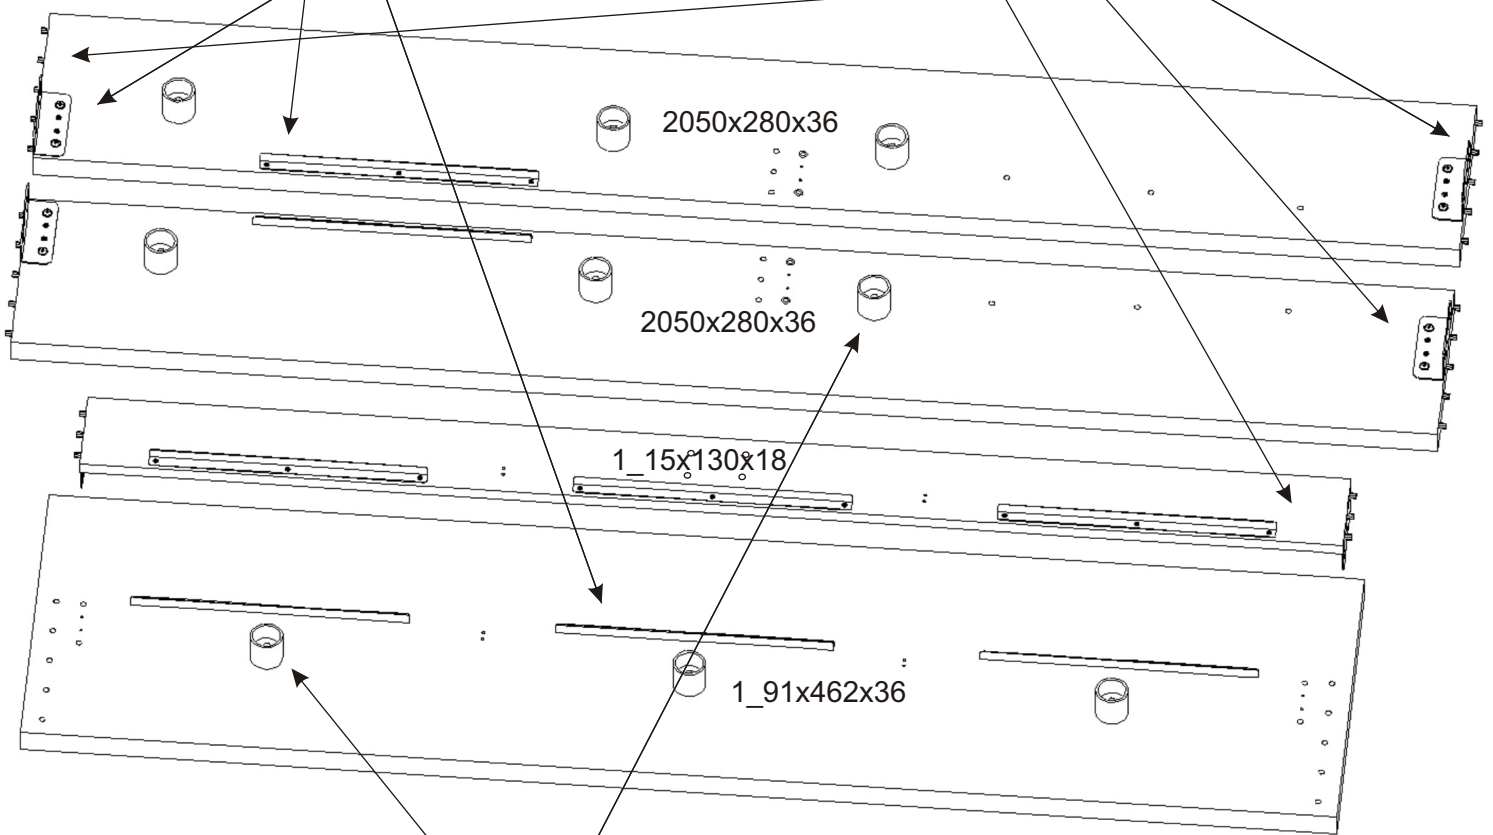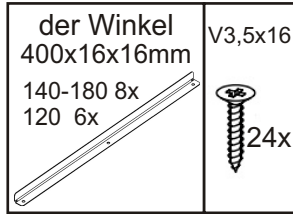


3.

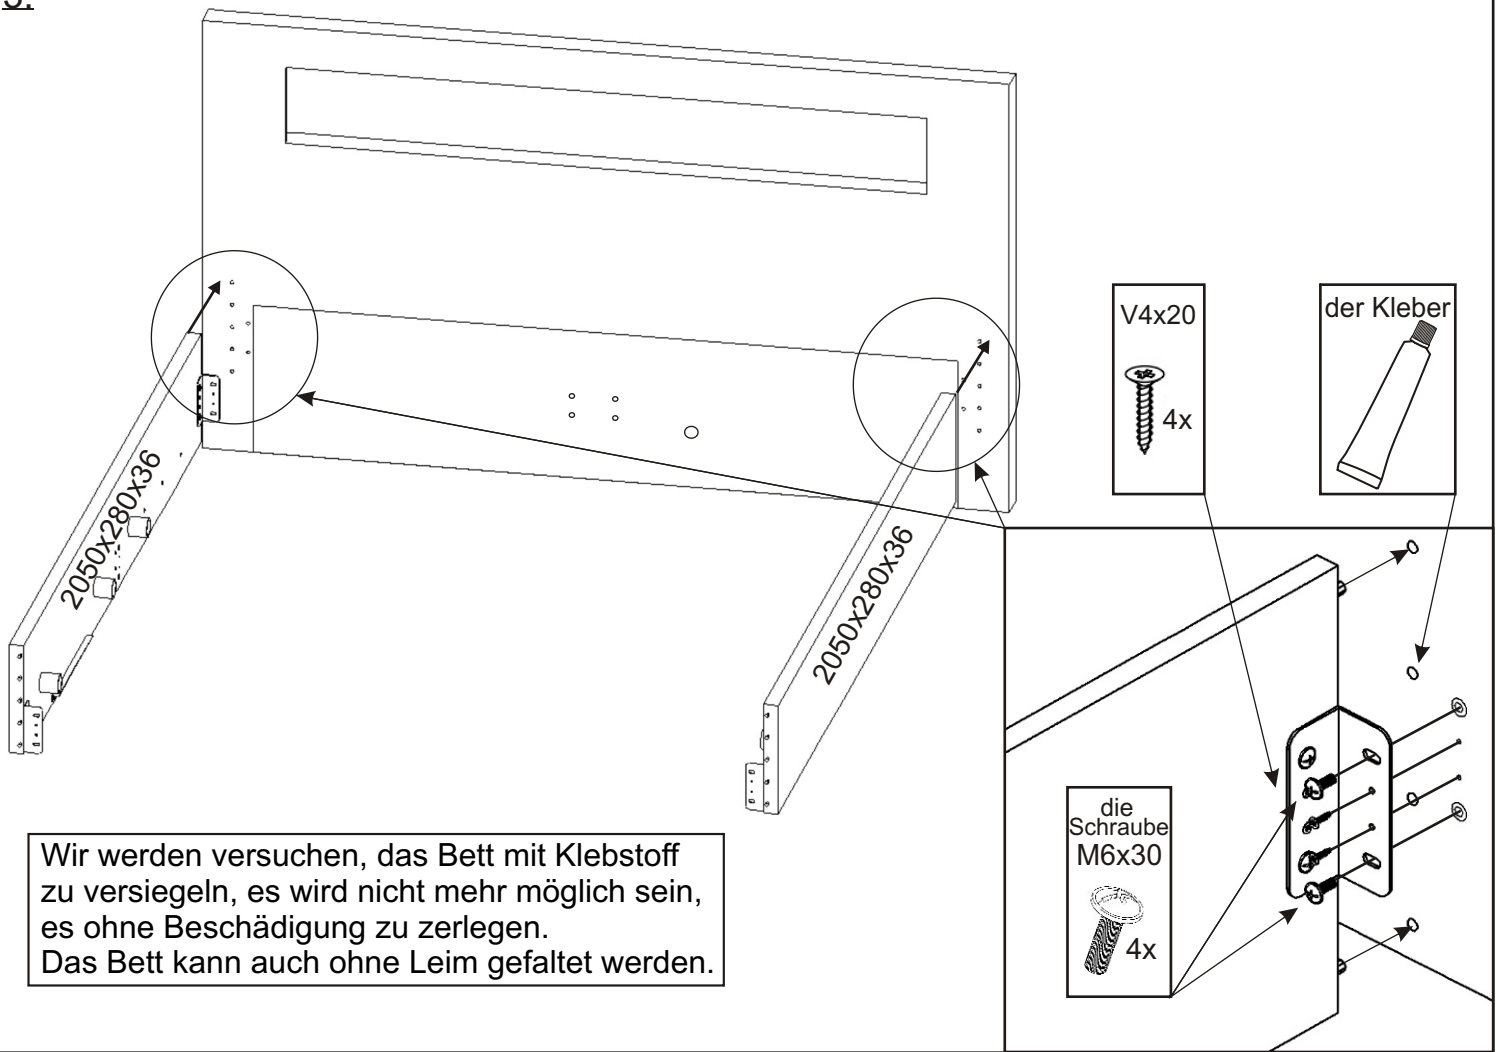


4.

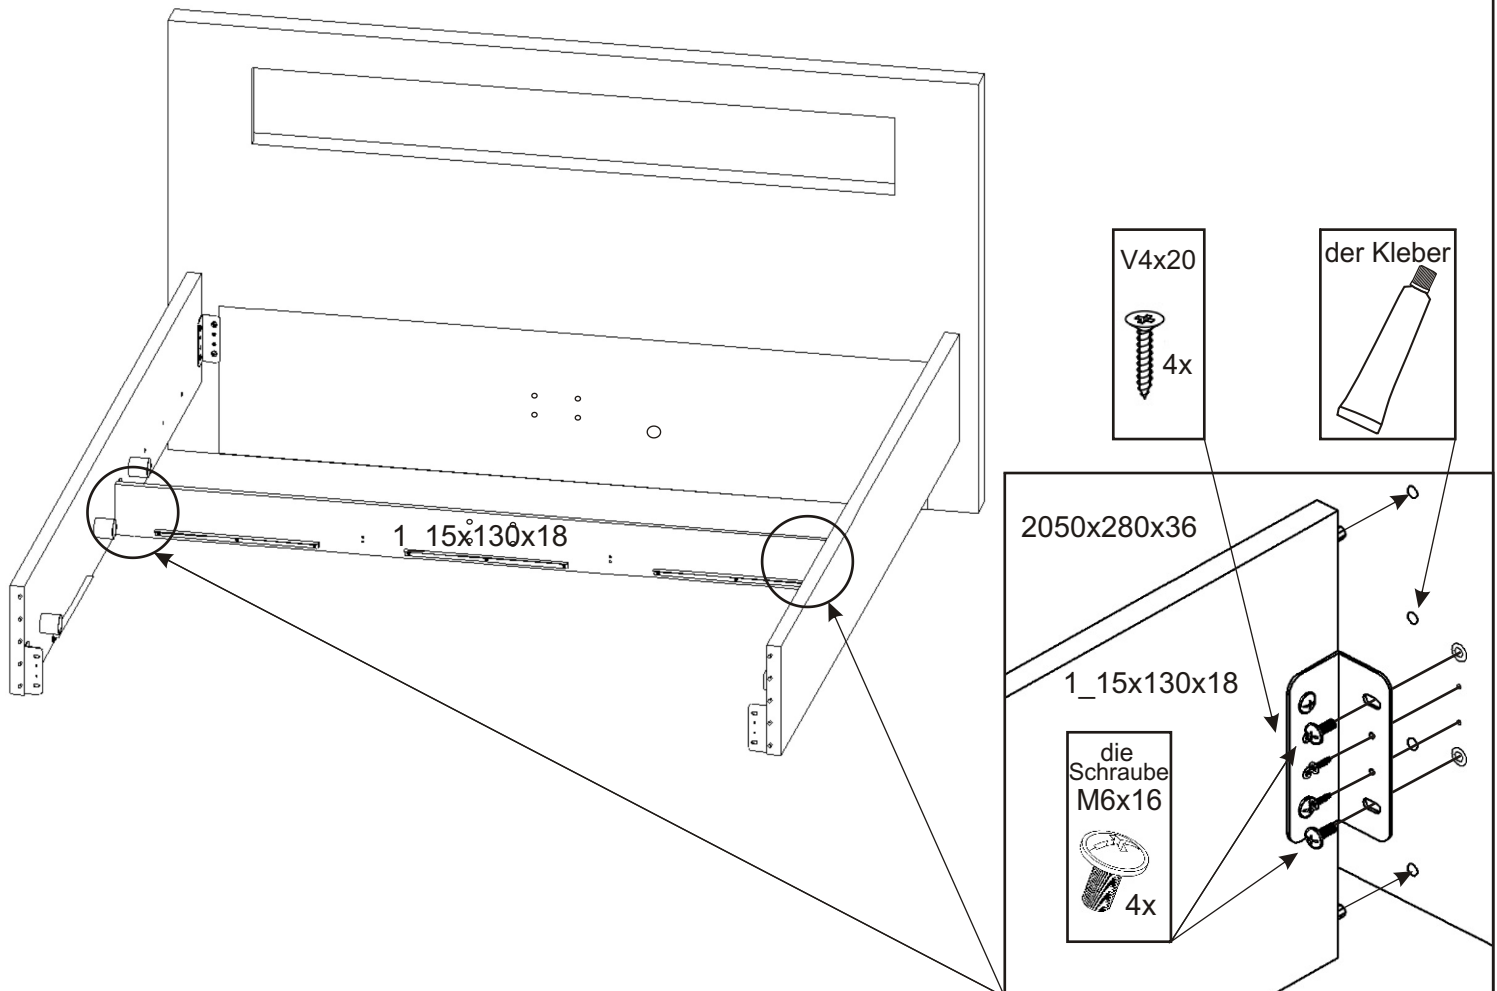

5.

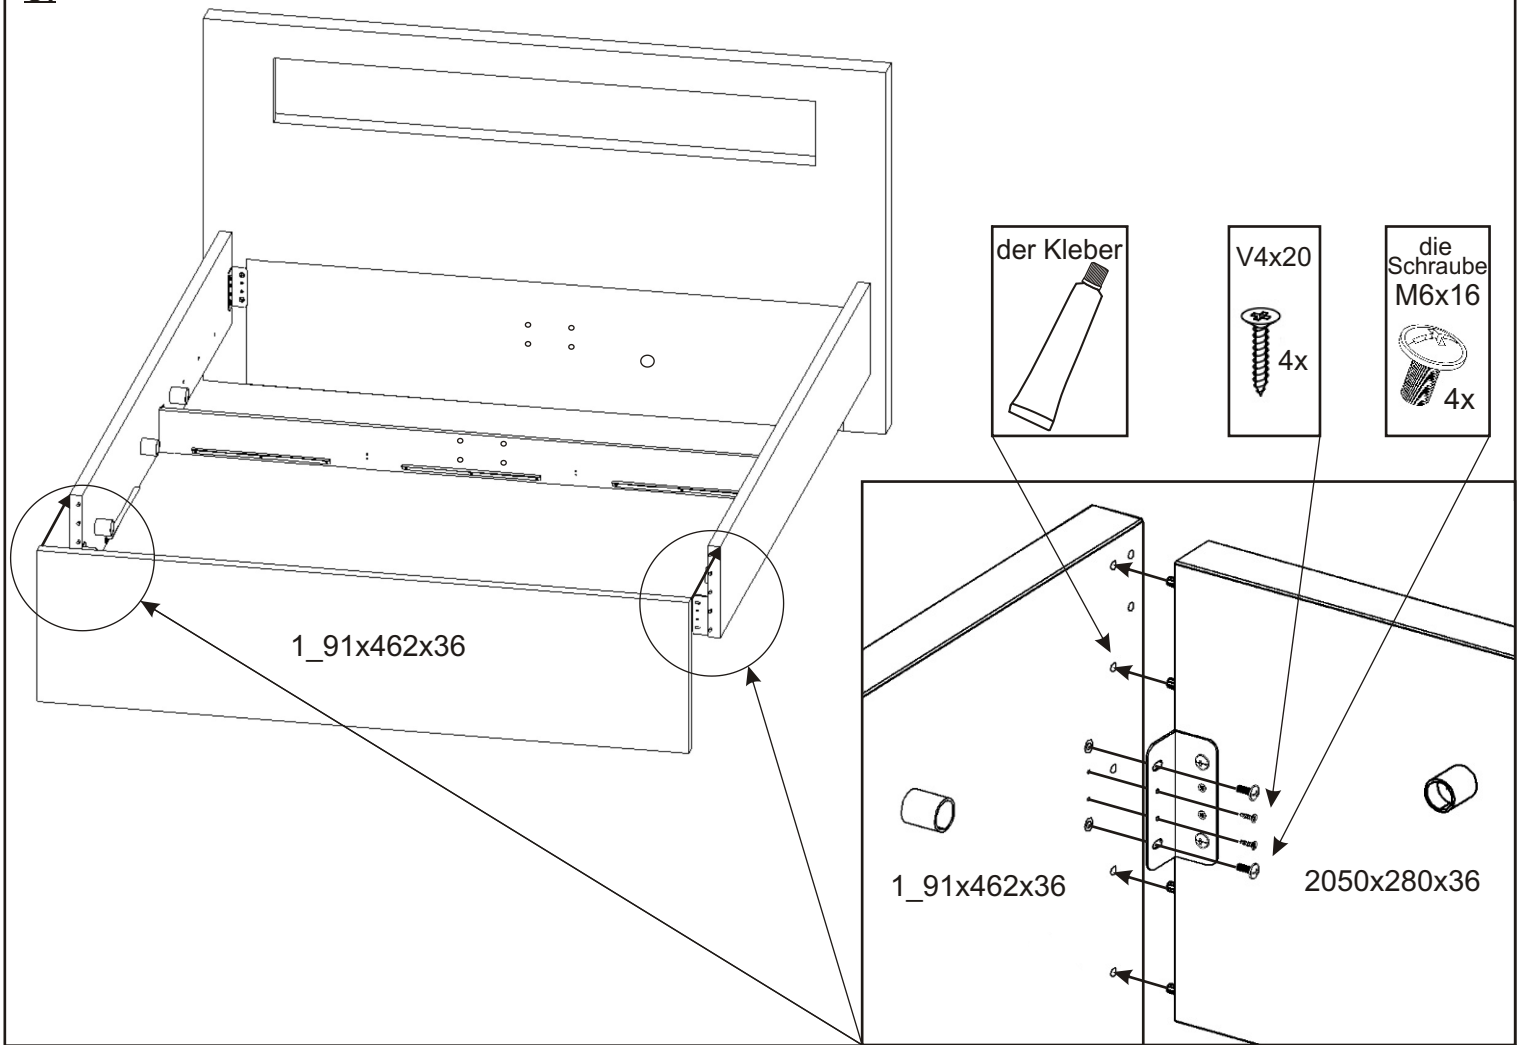


6.

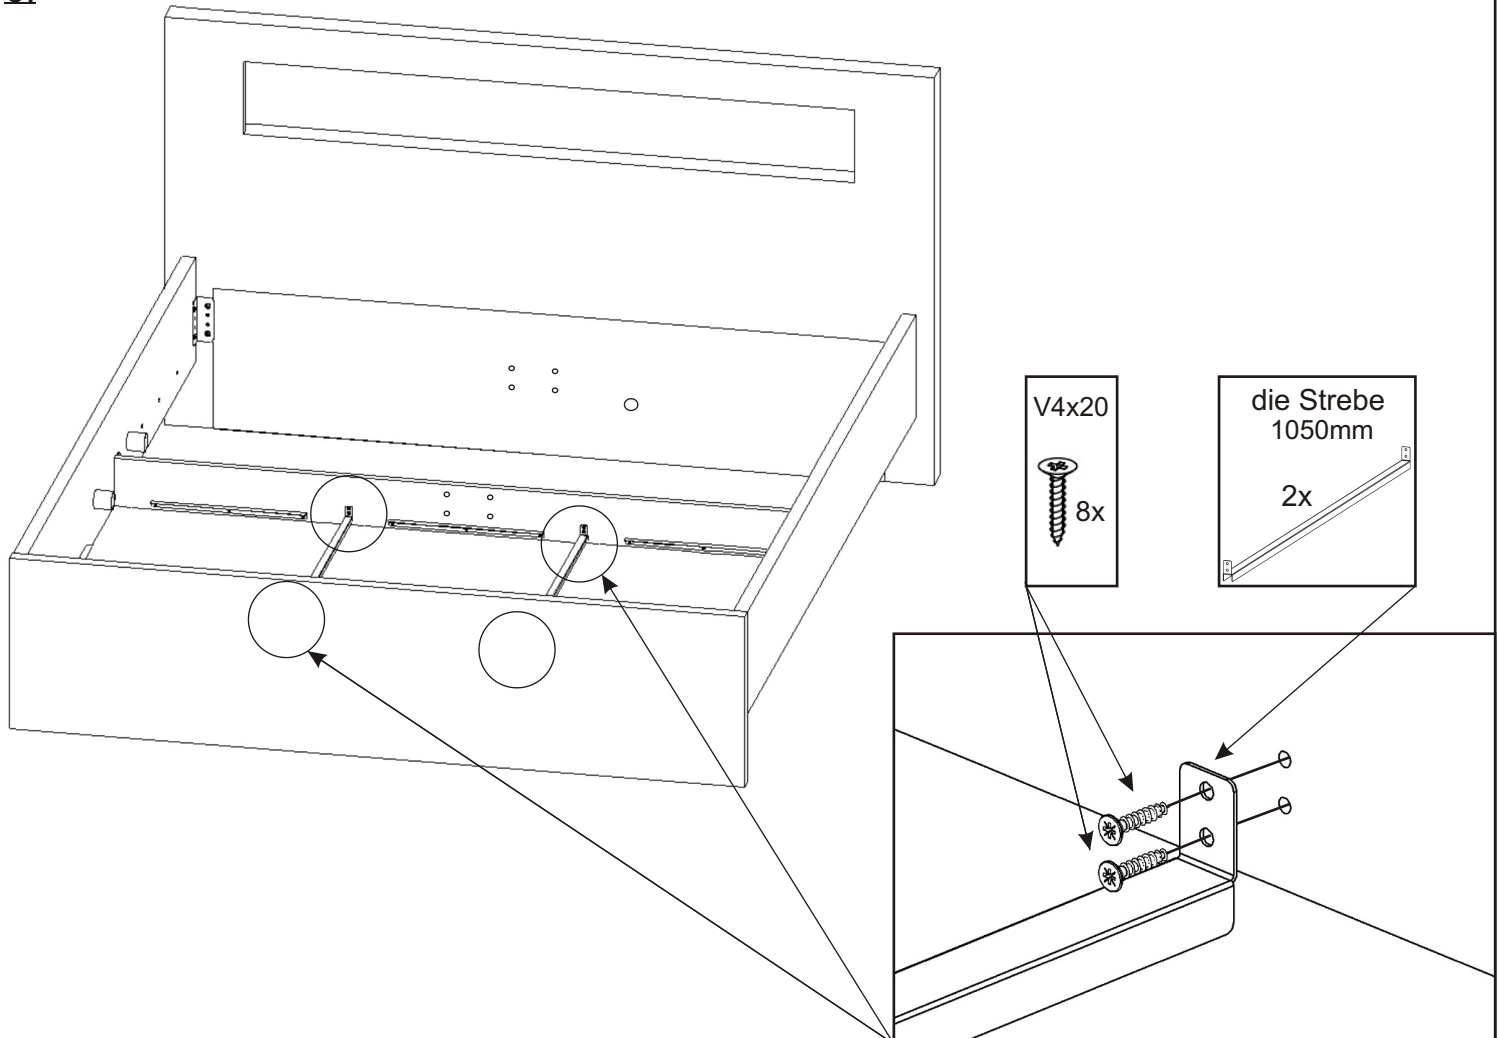

7.



7.1.

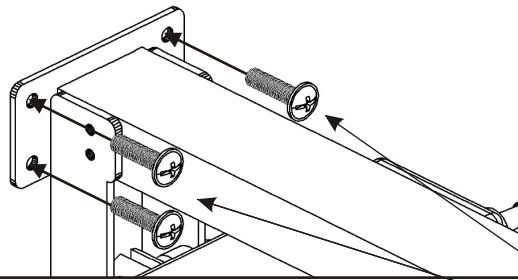


die
Schraube
M6x30



der Motor
982mm

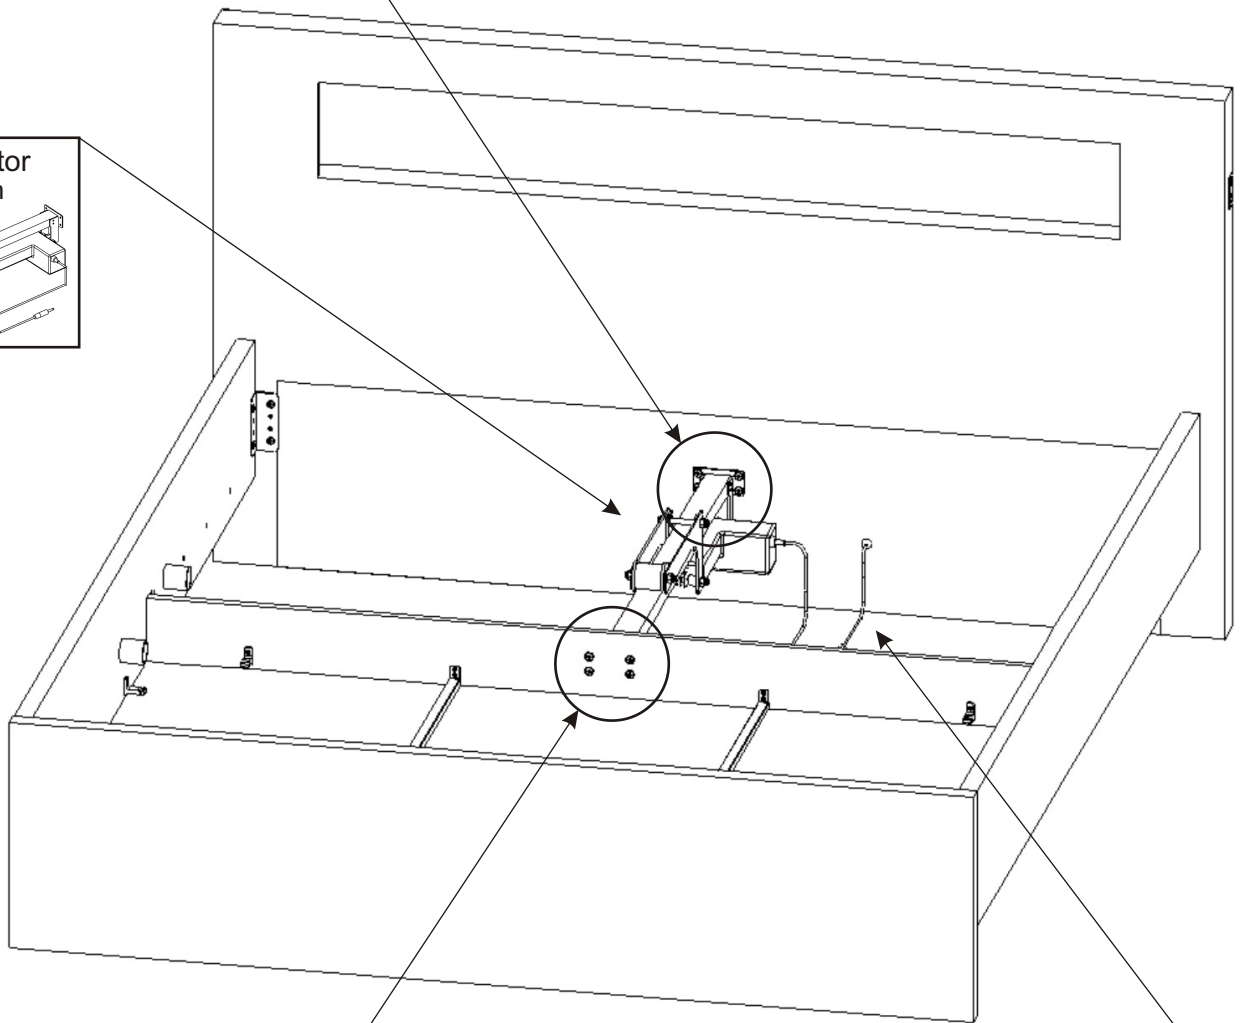

7.3.

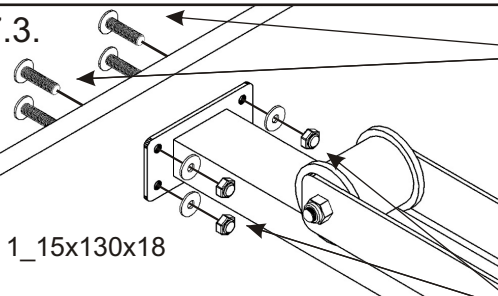


1_15x130x18

die
Schraube
M6x30




7.4.

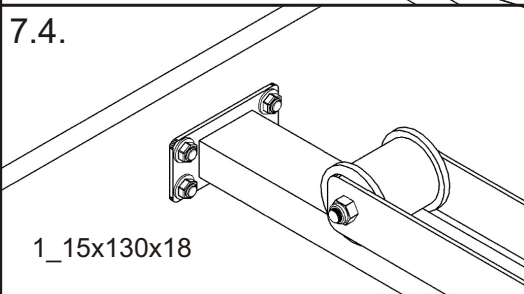


1_15x130x18


die Mutter
M6



die Unterlage
Ø 6,3




7.5.



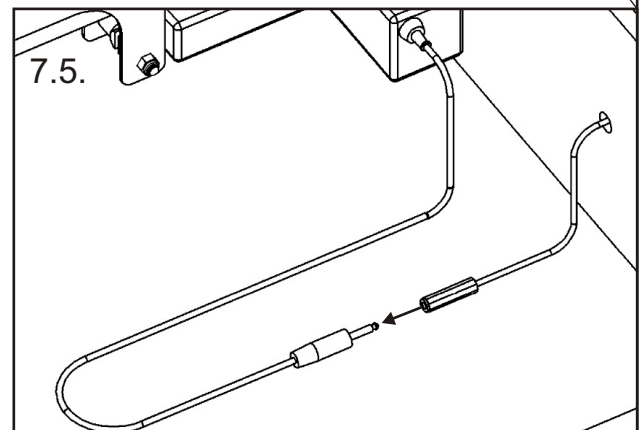


Jetzt verbinden wir das Motorkabel mit dem Kabel der Steuergerät.



8.1.

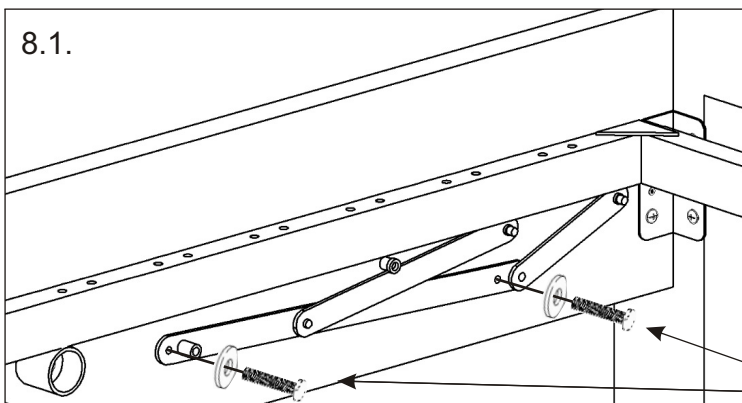

8.2.

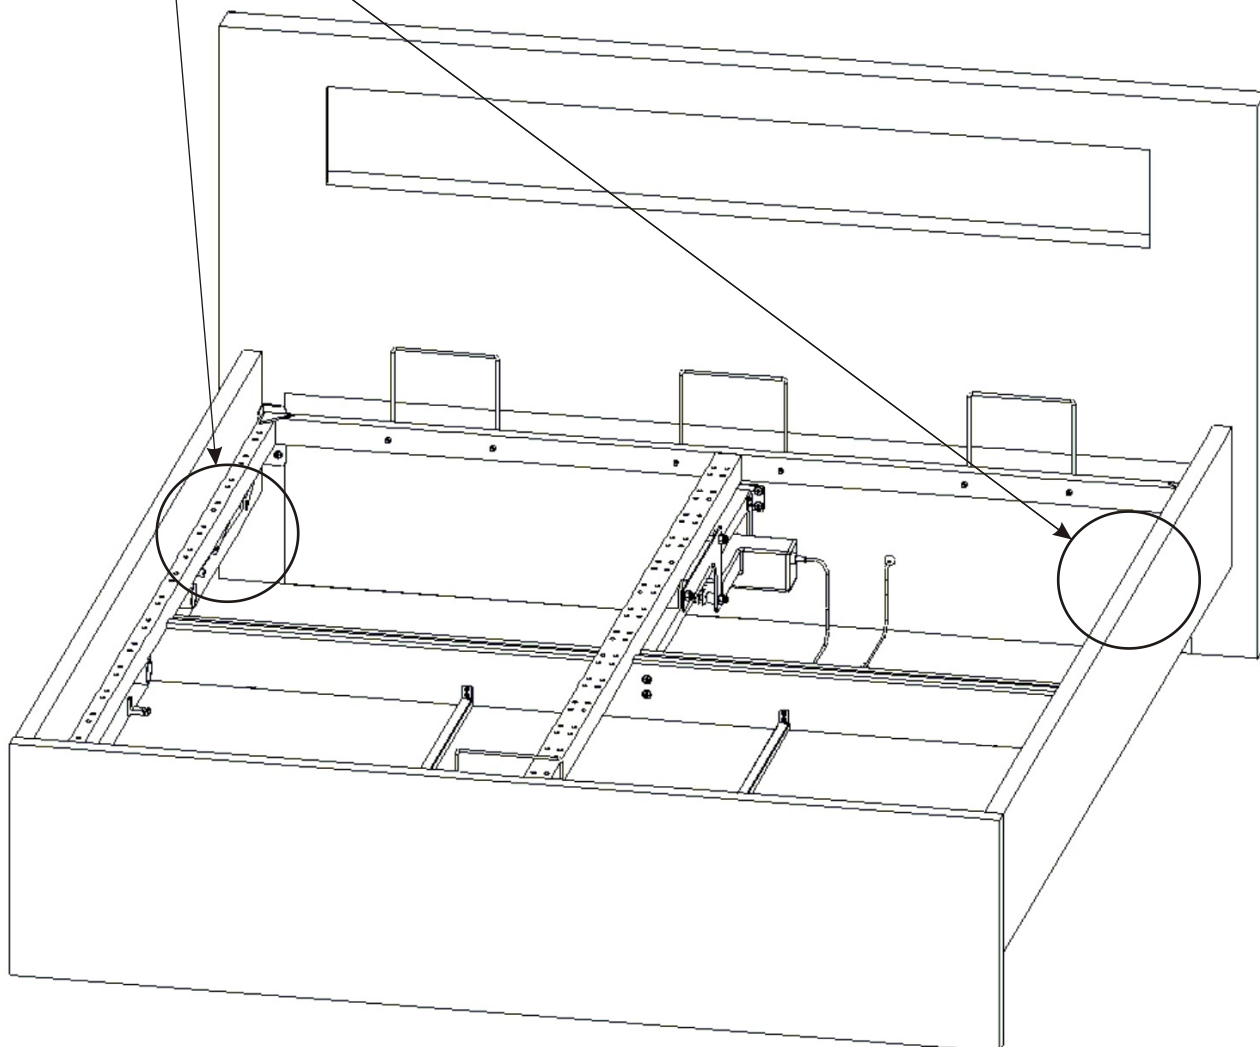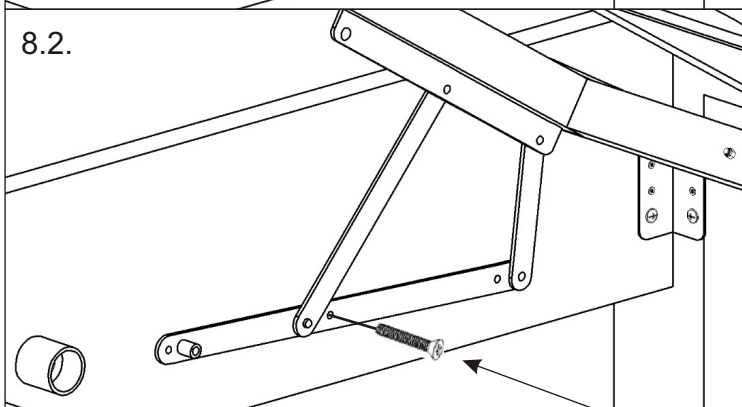

9.

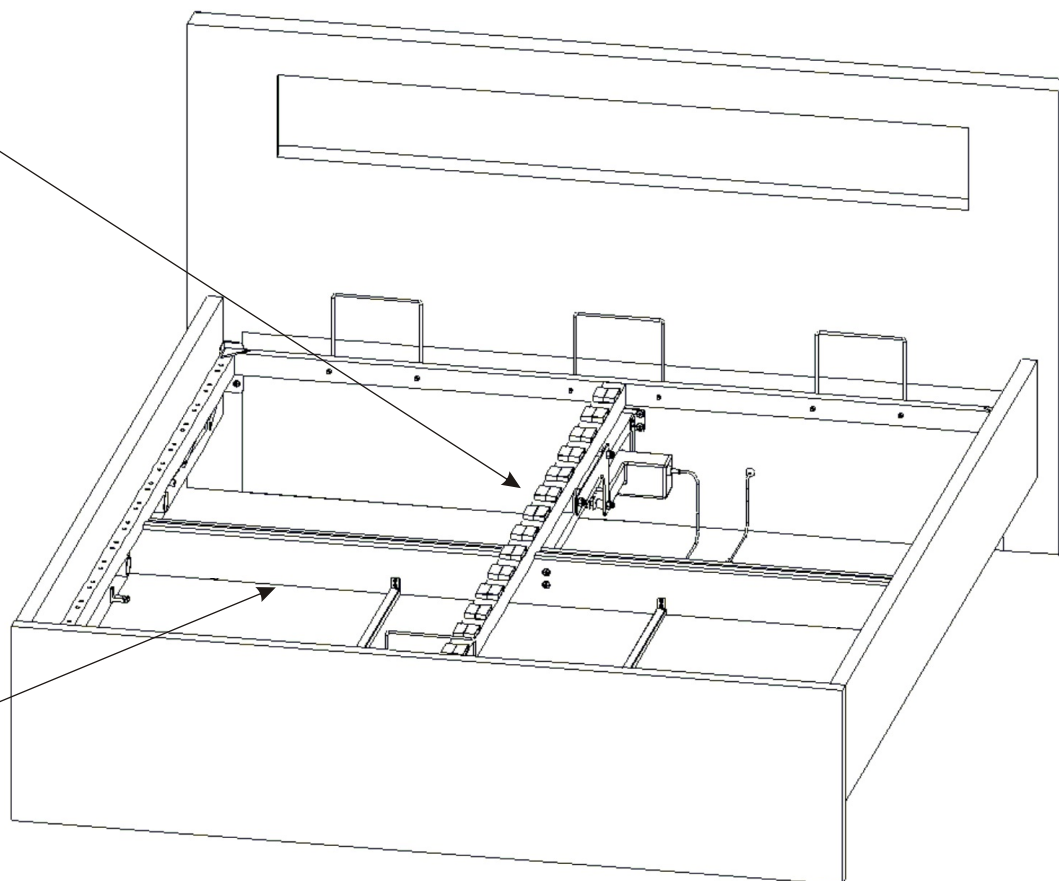

10.

